
Twin Branch Standpipe Connection

Model: V33WM


- Twin branch standpipe connection incorporating two 135° swivel nozzles for washing machine and / or dishwasher discharge hoses.
- Supplied with two blanking plugs.
- 1½" or 40 mm Outlet connection suitable for use with McAlpine WM3 standpipe assembly.
- The V33WM connector includes a vent hole, as required by BS EN 12056-2 and appliance manufacturers. The hole lets air into the discharge pipe, allowing the appliance to drain freely and helping to prevent siphoning.

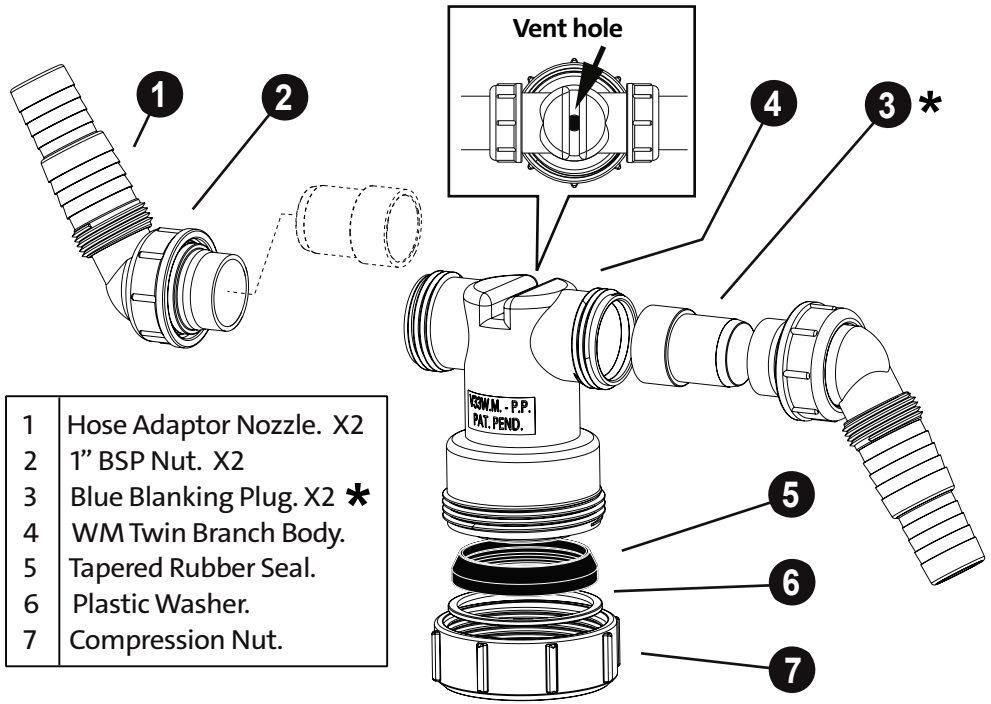


1	Hose Adaptor Nozzle. X2
2	1" BSP Nut. X2
3	Blue Blanking Plug. X2 *
4	WM Twin Branch Body.
5	Tapered Rubber Seal.
6	Plastic Washer.
7	Compression Nut.

Important: *
If a hose adaptor nozzle is not connected to an appliance, ensure the blue blanking plug supplied is installed to seal the unused inlet connection.

Caution: The V33WM fitting must only be installed vertically in conjuction with a standing pipe and trap arrangement as shown. Install appliance discharge hose(s) at the height specified by the appliance manufacturer. Do not connect the V33WM to an existing under-sink trap. The vent hole would sit below the basin water level, so water may leak out through it.
If an appliance is required to be connected via an under-sink trap use a WM11 fitting or a similar McALPINE trap arrangement with domestic appliance inlet(s).

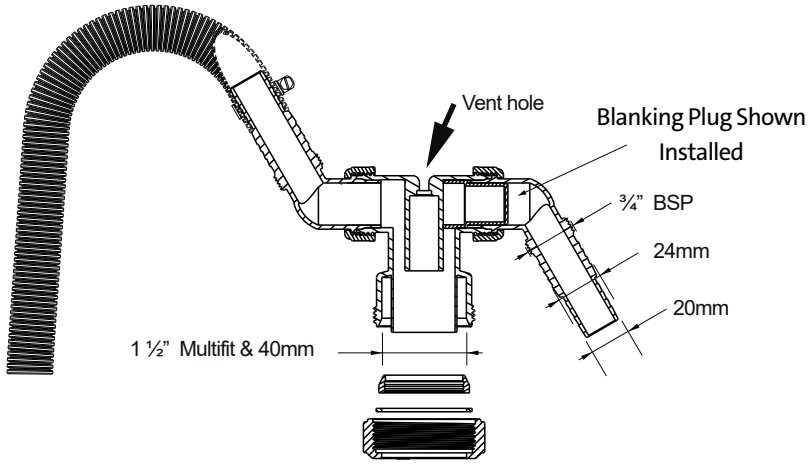

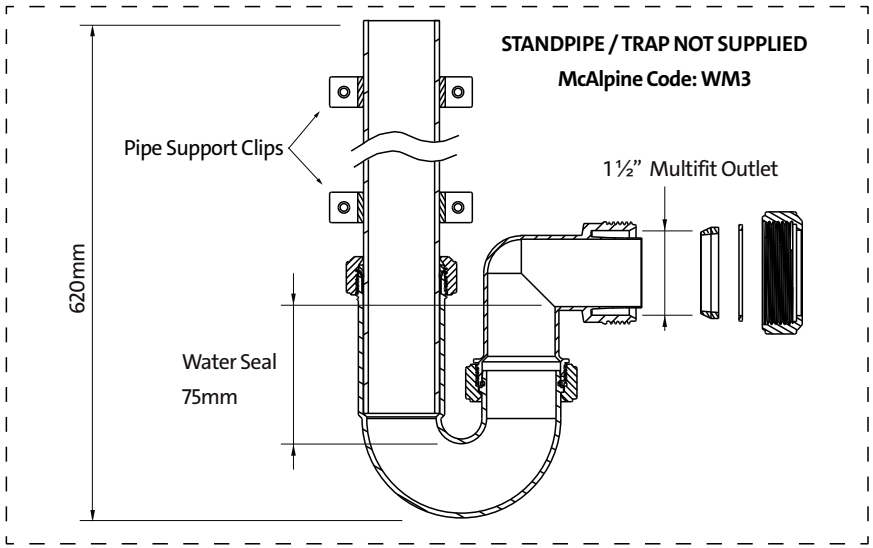

McAlpine & Co Ltd Kelvin Avenue Hillington Glasgow G52 4LF
Tel: 0141 882 3213 Fax: 0141 891 5065 Fax (Sales Office) 0141 883 5697
www.mcalpineplumbing.com

(en) L-V33WM
CJM / RR 31/07/26